



A, mechanism identification plate

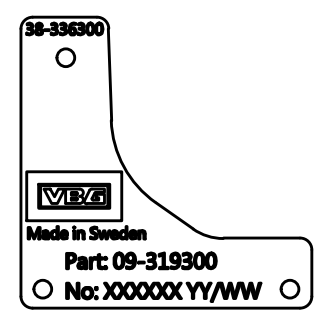

B, identification plate

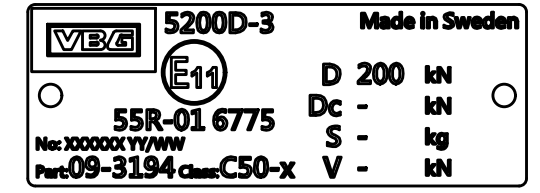

4 Coupling compatible with Ø50 drawbar eyes according to standard ISO 1102 and DIN 74053

3 Coupling center distance "L3" depends on pretension and drawbeam thickness (see table below)

Drawbeam thickness	L3	
	P=16	P=21
16	204	209
20	208	213
22	210	215
28	216	221
30	218	223
32	220	225

2 Mounting dimensions acc to standard SS 550000-1 category 5 and ISO 3584 category 5-7

1 Measures are for information only. Tolerance ±10mm.



VBG GROUP

Description
VBG 5200D-3 AM S/S

Modified Date	2020-10-27	Modified by	HB	Modification No.	13001	Issue	a		
3D Model No.	09-319400					Engineer	HB		
Sheet Size	A3	Scale	1:5	Projection		Drafting Date	2020-10-14		
Stage	P	Drawing No.	09-319400 (F) INFO					Drafted by	HB

This drawing is the property of VBG Group AB and is protected in accordance with prevailing law. Changes must be made in CAD-program, this concerns both 2D & 3D.